PRODUCT CATALOGUE | 2026-2027

DALI



DANISH AUDIOPHILE
LOUDSPEAKER INDUSTRIES



CONTENTS

CORE SPEAKERS
KORE 4
EPIKORE 8
RUBIKORE 10
MENUET SE 12
OPTICON MK2 14
SONIK 16
KUPID 20
ALTECO 22
FAZON 24

WIRELESS Hi-Fi
RUBICON C 26

SUBWOOFERS
V-16 F 28
P-10 DSS, K-14 F, E-12 F, E-9 F 30
BASIK SUB 32

PLUG 'N' PLAY
iO-8, iO-12 34
KATCH G2 36
VEGA 38

CUSTOM INSTALL
PHANTOM S 42
PHANTOM M 44
PHANTOM H 46
PHANTOM M-80 A 48
PHANTOM K 50
PHANTOM E, E-WR 52
GARDIAN OW-6 56
CI AMP-4750 DSP, CI AMP-2500 DSP, CI AMP-4125 DSP 58
IW-SUB S-100 60

SOUNDHUB, BluOS NPM 2i 62

ACCESSORIES 63

DALI KORE

The DALI KORE is the best loudspeaker we've ever created. It's the culmination of everything we've learned over four decades of loudspeaker design and manufacturing brought together in one outstanding loudspeaker.



Specifications	
Frequency Range (+/- 3 dB)	26 Hz – 34 kHz
Sensitivity	88 dB @ 2.83 volts
Nominal Impedance	4 Ohms
Minimum Impedance	3.2 Ohms @ 72 Hz
Maximum SPL	118 dB
Recommended Amplifier Power	50 – 1000 watts
Bass Drivers	2 × 11½ inch Balanced Drive SMC
Midrange Driver	7 inch Balanced Drive SMC
Hybrid High Frequency Driver	35 mm soft textile dome
Hybrid Super High Frequency Driver	10 × 55 mm planar magnetostatic
Crossover Frequencies (Hz)	290/390/2,100/12,000
Low Frequency Enclosure Type	2 × 72 litre reflex loaded
Reflex Tuning Frequency	22 Hz
Midrange Frequency Enclosure Type	Attenuated open back line
Enclosure Construction	Curved 28 mm birch laminate composite with aluminium die-cast, thermoset resin and cast composite structural elements
Connections	Custom designed, machined and gold-plated terminals suitable for bare wires, spade terminals and 4 mm plugs. Bi-wire/Bi-amp capable
Dimensions (H × W × D)	1,675 x 448 x 593 mm 66 × 17.6 × 23.3 inches
Weight	148 kg
Shipping Dimensions (H × W × D)	1,950 × 800 × 1,200 mm 76.7 × 31.4 × 47.2 inches
Shipping Weight	246 kg
Accessories	8 × Magnetic spike feet 4 × Terminal jumpers 1 × Cleaning cloth 8 × Transit wheels (attached to the bottom of the speaker) 2 × Magnetic front grille (located in the shipping crate)

All technical specifications are subject to change without notice.



Ammara Ebony
(Gold Metal)*



Ammara Ebony
(Black Metal)



High Gloss Steel Grey



High Gloss Velvet Red



High Gloss Black



High Gloss White



High Gloss Racing Green



High Gloss Navy Blue

DALI EPIKORE

The DALI EPIKORE series is the natural evolution of our acclaimed DALI EPICON series. Benefitting from four decades of loudspeaker research and development, EPIKORE inherits several new technologies from our DALI KORE flagship speaker, which together set ground-breaking standards in low distortion loudspeaker design. It combines ultimate audio realism and luxurious craftsmanship to create an exceptional visual and musical experience.



Specifications	EPIKORE 3	EPIKORE 7	EPIKORE 9	EPIKORE 11
Frequency range (+/- 3 dB)	42 - 34,000 Hz	35 - 34,000 Hz	29 - 34,000 Hz	29 - 34,000 Hz
Sensitivity	85 dB @ 1 m for 2.83 V	88 dB @ 1 m for 2.83 V	88 dB @ 1 m for 2.83 V	89 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm	6 ohm	4 ohm	4 ohm
Maximum SPL	108 dB	110 dB	112 dB	116 dB
Crossover frequency	2,800 / 12,500 Hz	800 / 2,500 / 12,500 Hz	400 / 3,100 / 12,500 Hz	170 / 370 / 3,100 / 12,500 Hz
Crossover principle	3-way	3½-way	4-way	4½-way
Recommended amplifier power	40 - 250 Watt	40 - 400 Watt	40 - 500 Watt	40 - 1,000 Watt
High frequency driver(s)	10 × 55 mm planar magnetostatic tweeter 1 x 35 mm soft dome			
Low/Mid frequency driver(s)	1 x 7 inch	2 x 7 inch	2 x 8 inch 1 x 6½ inch	4 x 8 inch 1 x 6½ inch
Enclosure type	Bass reflex			
Bass reflex tuning frequency	39 Hz	33 Hz	27 Hz	24 Hz
Recommended distance from rear wall	35 - 120 cm			
Dimensions (H x W x D)	467 x 238 x 416 mm 18.38 x 9.37 x 16.37 inches	1112 x 238 x 416 mm 43.77 x 9.37 x 16.37 inches	1308 x 299 x 553 mm 51.49 x 11.77 x 21.77 inches	1611 x 299 x 553 mm 63.42 x 11.77 x 21.77 inches
Weight incl. grille	22.0 kg 48.5 lb	40.5 kg 89.3 lb	64.0 kg 141.1 lb	72 kg 158.7 lb
Shipping weight	51.2 kg (pair) 112.9 lb (pair)	97.6 kg (pair) 215.2 lb (pair)	143.0 kg (pair) 315.3 lb (pair)	177 kg (pair) 390.2 lb (pair)
Accessories (pair)	4 × Terminal jumpers 1 × Cleaning cloth 2 × Magnetic front grille 8 x Rubber feet	8 × Magnetic spike feet 4 × Terminal jumpers 1 × Cleaning cloth 2 × Magnetic front grille 4 x Floor protection pads		
Optional accessories	EPIKORE STAND	N/A	N/A	N/A
Spike thread size	M6	M12	M12	M12



High Gloss Black



High Gloss Maroon



High Gloss Walnut



High Gloss White



All technical specifications are subject to change without notice.

DALI RUBIKORE

The DALI RUBIKORE series is a versatile loudspeaker range that covers roles from ambitious high-end stereo to high-performance home theatre and even background sound. With immense versatility of use across floorstanding, stand-mount, wall-mount, and home cinema applications, the RUBIKORE series covers every need in the home listening environment.









Specifications	RUBIKORE 2	RUBIKORE 6	RUBIKORE 8
Frequency range	50 - 26,000 Hz ±3 dB	38 - 34,000 Hz ±3 dB	38 - 34,000 Hz ±3 dB
Sensitivity	87 dB @ 1 m for 2.83 V	88.5 dB @ 1 m for 2.83 V	90.5 dB @ 1 m for 2.83 V
Nominal impedance	4 ohm		
Maximum SPL	107 dB	110dB	112 dB
Crossover frequency	2,800 Hz	800 / 2,600 / 14,000 Hz	500 / 800 / 2,400 / 14,000 Hz
Crossover principle	2-way	2½ + ½-way	2½ + ½ + ½-way
Recommended amplifier power	40 - 150 Watt	40 - 200 Watt	40 - 250 Watt
High frequency driver(s)	1 x 29 mm low loss soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	
Low/Mid frequency driver(s)	1 x 6½ inch	2 x 6½ inch	3 x 6½ inch
Enclosure type	Bass reflex		
Bass reflex tuning frequency	44 Hz	34 Hz	33 Hz
Other features	N/A		
Recommended distance from rear wall	20 - 120 cm	20 - 180 cm	25 - 180 cm
Dimensions (H x W x D)	350 x 195 x 335 mm 13.9 x 7.7 x 13.3 inches	990 x 200 x 380 mm 39.1 x 7.9 x 15.0 inches	1100 x 220 x 444 mm 43.5 x 8.7 x 17.6 inches
Weight incl. grille	9.5 kg 20.9 lb	23 kg 50.7 lb	30 kg 66.1 lb
Shipping weight	10.5 kg 23.1 lb	25 kg 55.1 lb	33 kg 72.7 lb
Accessories	Manual Rubber feet Polishing cloth (high gloss finish only) Front grille	Manual Polishing cloth (high gloss finish only) Front grille Premium Spike Set	
Spike thread size:	M8	M8	M8









RUBIKORE ON-WALL	RUBIKORE CINEMA
59 - 34,000 Hz ±3 dB	49 - 34,000 Hz ±3 dB
88.5 dB @ 1 m for 2.83 V	89 dB @ 1 m for 2.83 V
4 ohm	
108 dB	111 dB
2,900 / 14,000 Hz	2,800 / 14,000 Hz
2 + ½-way	2 + ½-way
20 - 150 Watt	40 - 200 Watt
17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	
1 x 6½ inch	2 x 6½ inch
Bass reflex	
49 Hz	36 Hz
Rotatable Hybrid Tweeter module	
0 - 30 cm	5 - 100 cm
465 x 278 x 142 mm 18.4 x 11.0 x 5.6inches	197 x 581 x 400 mm 7.7 x 22.8 x 15.7 inches
8.5 kg 18.7 lb	16 kg 35.2 lb
9.5 kg 20.9 lb	17.5 kg 38.5 lb
Manual Rubber Feet Polishing cloth (high gloss finish only) Front Grille	
N/A	N/A

High Gloss Black

High Gloss Maroon*





Natural Walnut

High Gloss White

High Gloss Maroon*: Available for RUBIKORE 2, 6, 8 only.
All technical specifications are subject to change without notice.

DALI MENUET SE

The special edition DALI MENUET SE is a tribute to high-performance compact stereo speakers. Built on the legacy of the popular DALI MENTOR MENUET and DALI MENUET, the MENUET SE adds a unique look and significantly improved components, giving this special sibling a personality all its own. Listen to these amazing loudspeakers and you'll hear clean, undistorted bass, an open and dynamic midrange and crisp highs with plenty of detail.

- Burl walnut cabinetry, unique for each pair
- Mundorf™ audiophile capacitors
- Internal copper/silver wiring
- Optimised woofer



High Gloss Wild Walnut



Natural Walnut

Specifications	
Frequency range	59 - 25,000 Hz ±3 dB
Sensitivity	86 dB @ 1 m for 2.83 V
Nominal impedance	4 ohm
Maximum SPL	105 dB
Crossover frequency	3000 Hz
Crossover principle	2-way
Recommended amplifier power	20 - 100 Watt
High frequency driver(s)	1 x 28 mm low loss soft dome
Low/Mid frequency driver(s)	1 x 4½-inch
Enclosure type	Bass reflex
Bass reflex tuning frequency	63 Hz
Other features	Thread inserts for optional wall bracket
Recommended distance from rear wall	2 - 30 cm
Dimensions (H x W x D)	250 x 150 x 225 mm 9.84 x 5.91 x 8.84 inches
Shipping dimensions (H x W x D)	330 x 390 x 300 mm 12.99 x 15.35 x 11.82 inches
Weight incl. grille	3.9 kg 8.60 lb
Shipping weight	9.2 kg (pair) 20.28 lb (pair)
Accessories	Front grilles Rubber feet Document pack
Optional accessories	DALI Universal Wall Bracket

All technical specifications are subject to change without notice.



DALI OPTICON MK2

Exceptional midrange clarity and sparkling high-frequency response. The DALI OPTICON MK2 series, with DALI's hybrid tweeter and SMC-based drivers, delivers excellent midrange clarity and sparkling high frequencies to any music or movie-watching experience.





Specifications	OPTICON 1 MK2	OPTICON 2 MK2	OPTICON 6 MK2
Frequency range	62 - 25,000 Hz ±3 dB	59 - 25,000 Hz ±3 dB	49 - 30.000 Hz ±3 dB
Sensitivity	85 dB @ 1 m for 2.83 V	86.5 dB @ 1 m for 2.83 V	88 dB @ 1 m for 2.83 V
Nominal impedance	4 ohm	4 ohm	4 ohm
Maximum SPL	105 dB	107 dB	110 dB
Crossover frequency	3,000 Hz	2,000 Hz	800 / 2.200 / 14.000 Hz
Crossover principle	2-way	2-way	2½ + ½-way
Recommended amplifier power	25 - 100 Watt	50 - 150 Watt	25 - 200 Watt
High frequency driver(s)	1 x 29 mm soft dome	1 x 29 mm soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome
Low/Mid frequency driver(s)	1 x 4¾-inch	1 x 6½-inch	2 x 6½-inch
Enclosure type	Bass reflex	Bass reflex	Bass reflex
Bass reflex tuning frequency	60 Hz	46 Hz	43.5 Hz
Other features	N/A	N/A	N/A
Recommended distance from rear wall	2 - 80 cm	10 - 80 cm	20 - 100 cm
Dimensions (H x W x D)	261 x 152 x 237 mm 10.28 x 5.98 x 9.33 inches	350 x 195 x 299 mm 13.78 x 7.67 x 11.77 inches	1001 x 195 x 332 mm 39.41 x 7.68 x 13.07 inches
Shipping dimensions (H x W x D)	340 x 400 x 300 mm 13.39 x 15.75 x 11.81 inches	280 x 460 x 385 mm 11.02 x 18.11 x 15.15 inches	280 x 1110 x 385 mm 11.02 x 43.70 x 15.15 inches
Weight incl. grille	4.6 kg 10.14 lb	7.7 kg 16.98 lb	18.7 kg 41.23 lb
Shipping weight	10.45 kg (pair) 23.05 lb (pair)	9.2 kg 20.28	21 kg 46.30 lb
Accessories	Front grilles Wall brackets Rubber feet Document pack	Front grilles Rubber feet Document pack	Front grilles Spike set Rubber feet Document pack
Spike thread size:	N/A	N/A	M8



OPTICON 8 MK2*	OPTICON LCR MK2	OPTICON VOKAL MK2
38 - 30.000 Hz ±3 dB	70 - 30.000 Hz ±3 dB	47 - 30.000 Hz ±3 dB
88.5 dB @ 1 m for 2.83 V	89 dB @ 1 m for 2.83 V	88 dB @ 1 m for 2.83 V
4 ohm	4 ohm	4 ohm
112 dB	109 dB	109 dB
380 / 2.200 / 14.000 Hz	2.800 / 14.000 Hz	2.400 / 14.000 Hz
3 + ½-way	2+½-way	2+½-way
40 - 300 Watt	30 - 150 Watt	30 - 150 Watt
17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome
2 x 8-inch 1x 6½-inch	1x 6½-inch	1x 6½-inch
Bass reflex	Bass reflex	Bass reflex
29.5 Hz	45 Hz	44 Hz
N/A	Rotatable Hybrid Tweeter LCRS	N/A
30 - 150 cm	0 - 10 cm	0 - 30 cm
1141 x 241 x 454 mm 44.92 x 9.49 x 17.87 inches	483 x 285 x 128 mm 19.02 x 11.22 x 5.03 inches	200 x 435 x 311 mm 7.87 x 17.12 x 12.24 inches
530 x 1250 x 330 mm 20.87 x 49.21 x 12.99 inches	190 x 540 x 340 mm 7.48 x 21.26 x 13.38 inches	280 x 540 x 385 mm 11.02 x 21.26 x 15.15 inches
34 kg 74.96 lb	8 kg 17.63 lb	9.2 kg 20.28 lb
37.1 kg 81.79 lb	9 kg 19.84 lb	10.5 kg 23.15 lb
Front grilles Spike set Rubber feet Document pack	Front grilles Rubber feet Document pack	Front grilles Rubber feet Document pack
M8	N/A	N/A



Satin Black



Satin White



Satin Tobacco Oak

*OPTICON 8 MK2 only available in Satin Black and Tobacco Oak.
All technical specifications are subject to change without notice.

DALI SONIK NEW

The DALI SONIK series brings high-end sound within reach. With advanced technology, versatile sizes, and stylish design, it's your gateway to stunning music and movie experiences at home. SONIK delivers an immersive sound experience that feels far beyond its price.





Specifications	SONIK 1	SONIK 3	SONIK 5
Frequency range	51 - 26,000 Hz ±3 dB	47 - 26,000 Hz ±3 dB	39 - 26,000 Hz ±3 dB
Sensitivity	86 dB @ 1 m for 2.83 V	87 dB @ 1 m for 2.83 V	88 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm	6 ohm	6 ohm
Maximum SPL	106 dB	108 dB	108 dB
Crossover frequency	2,800 Hz	2,300 Hz	2,200 Hz
Crossover principle	2-way	2-way	2-way
Recommended amplifier power	25 - 100 Watt	25 - 150 Watt	30 - 150 Watt
High frequency driver(s)	1 x 29 mm low loss soft dome	1 x 29 mm low loss soft dome	1 x 29 mm low loss soft dome
Low/Mid frequency driver(s)	1 x 5¼-inch	1 x 7-inch	2 x 5¼-inch
Enclosure type	Bass reflex	Bass reflex	Bass reflex
Bass reflex tuning frequency	51 Hz	46 Hz	43 Hz
Other features	Integrated wall bracket	N/A	N/A
Recommended distance from rear wall	1 - 50 cm	5 - 50 cm	15 - 100 cm
Dimensions (H x W x D)	274 x 162 x 231 mm 10.8 x 6.4 x 9.1 inches	350 x 200 x 306 mm 13.7 x 7.8 x 12.1 inches	826 x 162 x 270 mm 32.5 x 6.3 x 10.6 inches
Weight incl. grille	4.1 kg 9.03 lb	6.5 kg 14.13 lb	10.8 kg 23.80 lb
Shipping weight	10 kg (pair) 22.04 lb (pair)	15.1 kg (pair) 33.28 lb (pair)	26.6 kg (pair) 58.64 lb (pair)
Accessories	Front grilles Rubber feet Rubber pads Document pack	Front grilles Rubber pads Document pack	Front grilles Rubber pads Spikes Lock nuts Hemispherical rubber feet Spike outriggers Spike outrigger screws Toolkit Document pack
Spike thread size	N/A	N/A	M8



SONIK 7	SONIK 9	SONIK ON-WALL	SONIK CINEMA
36 - 30,000 Hz ±3 dB	34 - 30,000 Hz ±3 dB	55 - 26,000 Hz ±3 dB	46 - 26,000 Hz ±3 dB
88.5 dB @ 1 m for 2.83 V	90 dB @ 1 m for 2.83 V	87 dB @ 1 m for 2.83 V	89,5 dB @ 1 m for 2.83 V
6 ohm	4 ohm	6 ohm	6 ohm
110 dB	111 dB	107 dB	109 dB
2,300 / 14,000 Hz	400 / 2,100 / 14,000 Hz	2,400 Hz	2,200 Hz
2 + ½-way	2½ + ½-way	2-way	2-way
30 - 180 Watt	50 - 300 Watt	25 - 100 Watt	25 - 150 Watt
17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	17 x 45 mm planar magnetostatic tweeter 1 x 29 mm low loss soft dome	1 x 29 mm low loss soft dome	1 x 29 mm low loss soft dome
2 x 7-inch	3 x 7-inch	1x 5¼-inch	2 x 5¼-inch
Bass reflex	Bass reflex	Bass reflex	Bass reflex
39 Hz	35 Hz	50 Hz	46 Hz
N/A	N/A	Integrated wall bracket LCRS	LCRS
20 - 100 cm	20 - 120 cm	0 - 10 cm	0 - 50 cm
1,006 x 200 x 330 mm 39,6 x 7.8 x 13.0 inches	1,126 x 214 x 376 mm 44.3 x 8.4 x 14,8 inches	385 x 245 x 123 mm 15.2 x 9.7 x 4.8 inches	170 x 571 x 214 mm 6.7 x 22.5 x 8.4 inches
16.2 kg 35.71 lb	24.6 kg 54.23 lb	4.9 kg 10.80 lb	7.90 kg 17.41 lb
19.7 kg 43.43 lb	30.1 kg 66.35 lb	10.9 kg (pair) 24.03 lb (Pair)	9.6 kg 21.16 lb
Front grilles Rubber pads Spikes Lock nuts Hemispherical rubber feet Spike outriggers Spike outrigger screws Toolkit Document pack	Front grilles Rubber pads Spikes Lock nuts Hemispherical rubber feet Spike outriggers Spike outrigger screws Toolkit Document pack	Front grilles Rubber pads Document pack	Front grille Rubber pads Document pack
M8	M8	N/A	N/A

All technical specifications are subject to change without notice.



Black Ash



White



Light Oak



Dark Walnut

DALI KUPID

Sleek and compact, the DALI KUPID is built for those who love great sound but want something that fits effortlessly into any space on a modest budget. Whether it's your main system or a second setup in the garage or holiday home, KUPID delivers full and refined sound. Designed to fit in. Built to stand out.



Golden Yellow | Caramel White | Dark Walnut | Chilly Blue | Black Ash

Specifications	
Frequency range	63 – 25,000 Hz ±3 dB
Sensitivity	83 dB @ 1 m for 2.83 V
Nominal impedance	4 ohm
Maximum SPL	103 dB
Crossover frequency	2,100 Hz
Crossover principle	2-way
Recommended amplifier power	40 - 120 Watt
High frequency driver	1 x 26 mm soft dome
Low/Mid frequency driver(s)	1 x 4½ inch
Connection input	Single wire
Enclosure type	Bass reflex
Bass reflex tuning frequency	53 Hz
Recommended distance from rear wall	2.5 - 60 cm 1 - 23.6 inches
Dimensions (H x W x D)	245 x 150 x 198 mm 9.64 x 5.91 x 7.80 inches
Weight incl. grille	2.9 kg 6.4 lb
Shipping weight	7.5 kg (pair) 16.5 lb (pair)
Accessories (Included)	2x Wall brackets 4x Wall bracket screws 8x Rubber feet 2x Front grilles

All technical specifications are subject to change without notice.

DALI ALTECO C-1

A height speaker and traditional stereo speaker in one stylish cabinet.
The up- and down-firing DALI ALTECO C-1 adds height information to a home cinema setup for amazing movie-watching immersion. It's also a discreet alternative to a traditional bookshelf speaker design.



Black




White



Walnut

Specifications	
Frequency range	74 - 26,000 Hz ±3 dB
Sensitivity	83 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm
Maximum SPL	103 dB
Crossover frequency	2.100 Hz
Crossover principle	2-way
Recommended amplifier power	40 - 100 Watt
High frequency driver(s)	1 x 21 mm low loss soft dome
Low/Mid frequency driver(s)	1 x 4½-inch
Enclosure type	Closed box
Bass reflex tuning frequency	N/A
Other features	Integrated wall bracket
Recommended distance from rear wall	1 - 50 cm
Dimensions (H x W x D)	200 x 252 x 160 mm 7.87 x 9.92 x 6.29 inches
Shipping dimensions (H x W x D)	250 x 415 x 333 mm 9.84 x 16.34 x 13.11 inches
Weight incl. grille	2.9 kg 6.39 lb
Shipping weight	6.8 kg (pair) 14.99 lb (pair)
Accessories	Front grilles Rubber feet Rubber bumpers Document pack

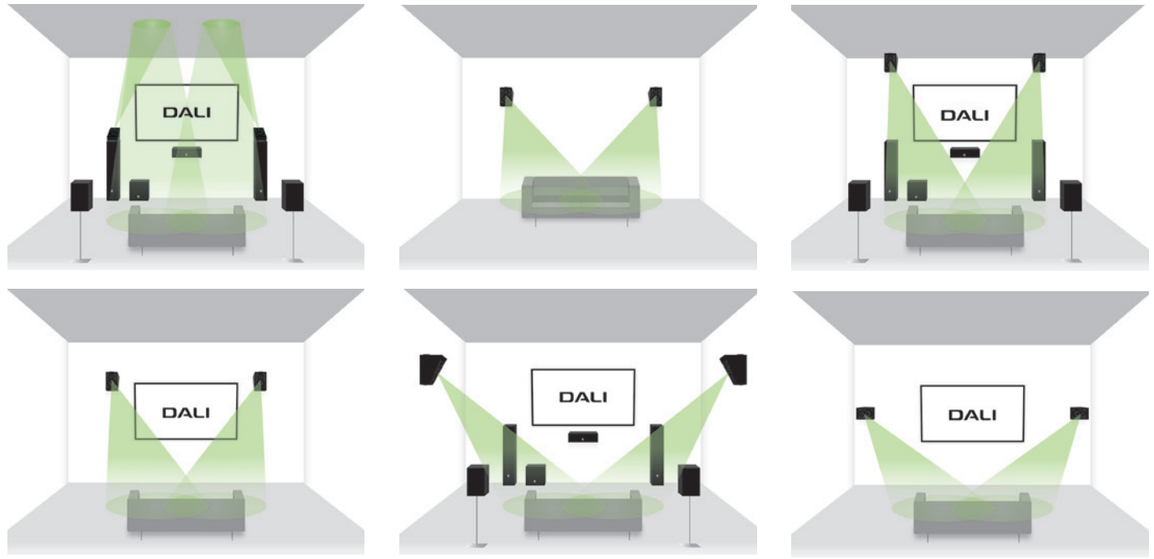



All technical specifications are subject to change without notice.

DALI FAZON SAT

The DALI FAZON SAT is an elegant satellite speaker that performs equally well for TV or stereo sound, or as part of a multichannel surround setup. It has a curved, high-gloss lacquered aluminium cabinet, a coated composite front baffle, and a snug-fitting grille held in place with magnets for quick and easy removal.



Iron Black



Chalk White

Specifications	
Frequency Range [+/- 3] dB [Hz]	86 - 25,000
Sensitivity [2.83V/1m] [dB]	86.0
Nominal Impedance [ohms]	6
Maximum SPL [dB]	104
Recommended Amp. Power (Watts)	20-120
Crossover Frequencies [Hz]	1,800
Crossover Principle	2-way
High Frequency Driver	28 mm soft dome
Low Frequency/midrange Driver(s)	1 x 4½"
Enclosure Type	Closed
Bass Reflex Tuning Frequency [Hz]	-
Connection Input(s)	Single wire
Recommended Placement	Stand, Shelf, On wall, Above/below TV
Magnetic Shielding	No
Dimensions (H x W x D) [mm]	255.5 x 138 x 87 Including table stand: 287 x 146 x 172
Dimensions (H x W x D) [inches]	9.8 x 5.4 x 3.4 Including table stand: 11.2 x 5.7 x 6.7
Weight [kg]	2.4
Accessories incl.	Manual, Assembly tools, Table stand, Wall bracket
Optional accessories	Ice colour grille Black colour grille

All technical specifications are subject to change without notice.

DALI RUBICON C

Best-in-class wireless active speaker system with large scale sound performance. Combining the performance of passive speakers with the convenience of wireless technology, the active DALI RUBICON C series delivers the outstanding sound of our RUBICON speakers without the wires. The RUBICON C series is part of the DALI EQUI ecosystem of wireless active speakers and preamplifiers.





	RUBICON 2 C	RUBICON 6 C
Frequency range (+/-3 db) [Hz]	46 - 26,000	37 - 30,000
Maximum SPL [dB]	108	110
High frequency driver	1 x 29 mm soft dome	1 x 29 mm soft dome 1 x 17 x 45 mm planar
Low frequency/mid-range driver(s)	1 x 6½"	2 x 6½"
Enclosure type	Bass Reflex	
Bass reflex tuning frequency [hz]	51.0	36.5
Amplifier output [watt]	250	
Input impedance [Ω]	5k	
Input sensitivity [mV]	1,400	1,250
Wireless input	Full 24 Bit / 96 kHz (No bit-loss attenuated)	
Wireless audio RF band	5725-5875 MHz	
Amplifier type	Discrete Class D (Closed Loop, Self Oscillating)	
Onboard DAC	Burr Brown PCM1796 (Bal-anced output)	
Maximum digital resolution [bits/KHz]	24 / 96	
Recommended distance from wall [cm]	20 - 120	20 - 180
Input mains	Universal mains 100 - 240V	
Maximum power consumption [W]	325	
Standby power consumption [W]	1.2	
Dimensions (HxWxD) [mm]	353 x 195 x 335	990 x 200 x 380
Weight [kg/lb]	8.4 / 18.5	20.8 / 45.8
Accessories included	Manual, Rubber Feet, Front Grille	Manual, Rubber Feet, Front Grille, SPIKE SET PREMIUM
Spike thread size:	N/A	M8

Complete your RUBICON C set by pairing with DALI SOUND HUB.
All technical specifications are subject to change without notice.



Lacquer Black



Lacquer White



Lacquer Walnut



DALI SUBWOOFER V-16 F

With an impressive 16-inch bass driver, 1,500 watts of DSP-controlled amplification, convenient front-panel controls, and exceptional craftsmanship inside and out, the DALI SUB V-16 F is the ultimate high-power, wide-bandwidth, ultra-low-distortion subwoofer for high-end home cinema setups and multichannel music systems. The DALI SUB V-16 F has earned THX® Certified Dominus status, the highest level of THX performance certification. The certification establishes a strategic partnership between DALI and THX, reflecting DALI's commitment to the highest standards of home cinema performance.





Specifications	
Frequency range (in-room)	19 - 200 Hz ±3 dB (Line input) 19 - 500 Hz ±3 dB (LFE input)
Input impedance	9 kohm
Maximum SPL	122 dB @ 1m
Low frequency driver	1 x 16 inch long-throw
Enclosure type	Bass reflex
Bass Tuning Frequency	18 Hz
Connection Input(s)	2 x RCA unbalanced (Stereo, mono or LFE) 2 x XLR balanced (Stereo, mono or LFE)
Connection output(s)	1 x XLR balanced (Follower out)
Continuous amplifier output power	1500 W RMS
Max. amplifier output power	2500 W Peak
Mains power rating	550 W
Standby consumption	≤ 0.5 W
Other features	Flush mount option Constant Group Delay mode Room Mode Attenuation mode Cinema/Music/Boost sound modes Closed box mode
Dimensions (H x W x D)	570.5 x 520 x 560 mm 22.46 x 20.47 x 22.04 inches
Shipping dimensions (H x W x D)	730 x660 x 710 mm 28.74 x 25.98 x 27.95 inches
Minimum in-wall installation dimensi-ons (H x W x D)	> 590 x 560 x 650 mm > 23.23 x 22.05 x 25.59 inches
Weight	55 kg 121.25 lb
Shipping weight	65 kg 143.30 lb
Accessories included	4 x Optional port plugs 1 x Mains power cable
Optional accessories	DALI Spike Set
Spike thread size:	M10

All technical specifications are subject to change without notice.

DALI SUBWOOFERS

A subwoofer is the perfect tool for enhancing the low-end response of an existing speaker setup. If you can't get enough bass, adding a subwoofer to your setup will bring that heart-thumping bass into your living room.







Specifications	SUB E-9 F	SUB E-12 F
Frequency Range [+/- 3] dB [Hz]	37 - 200	28 - 190
Input Impedance [kohm]	25	25
Maximum SPL [dB]	111	112
Crossover Frequencies [Hz]	40 - 120	40 - 120
Low Frequency Driver(s)	1 x 9" long stroke	1 x 12" long stroke
Enclosure Type	Bass reflex	Bass reflex
Bass Reflex Tuning Frequency [Hz]	39	36.0
Connection Input(s)	RCA, Stereo (low-pass filtered) LFE (Mono)	RCA, Stereo (low-pass filtered) LFE (Mono)
Recommended Placement	Floor, near wall or corner	Floor, near wall or corner
Magnetic Shielding	No	No
Max. Amplifier Power Output [RMS Watts]	220	220
Continous IEC Power Output [RMS Watts]	170	170
Max. Power Consumption [Watts]	250	250
Finishes	Satin White, Satin Black	
Dimensions (H x W x D) [mm]	307 x 287 x 310	370 x 340 x 380
Dimensions (H x W x D) [inches]	12.1 x 11.3 x 12.2	14.6 x 13.4 x 15.0
Weight [kg/lb]	11.0/24.2	15.3/33.7





Specifications	SUB K-14 F	SUB P-10 DSS
Frequency Range [+/- 3] dB [Hz]	29 - 160	24 - 250
Input Impedance [kohm]	10	26
Maximum SPL [dB]	115	112
Crossover Frequencies [Hz]	40 - 120 (variable low-pass)	40 - 120
Low Frequency Driver(s)	1 x 14" long stroke	1 x 10" long stroke active 2 x 10" long stroke passive
Enclosure Type	Bass reflex	Closed box with dual passive radiators
Bass Reflex Tuning Frequency [Hz]	34	31.5
Connection Input(s)	RCA, Stereo (low-pass filtered) LFE (Mono)	RCA, Stereo (low-pass filtered) LFE (Mono)
Recommended Placement	Floor, near wall or corner	Floor, near wall or corner
Magnetic Shielding	No	No
Max. Amplifier Power Output [RMS Watts]	500	500
Continous IEC Power Output [RMS Watts]	450	300
Max. Power Consumption [Watts]	650	550
Finishes	Black Satin	High Gloss Lacquer White, High Gloss Lacquer Black
Dimensions (H x W x D) [mm]	430 x 395 x 425	370 x 340 x 340
Dimensions (H x W x D) [inches]	16.9 x 15.6 x 16.7	14.6 x 13.4 x 13.4
Weight [kg/lb]	26.4/58.2	19.5/43.0

All technical specifications are subject to change without notice.

All technical specifications are subject to change without notice.

DALI BASIK SUB NEW

Designed to complete your compact speaker system, the DALI BASIK SUB adds depth and precision to music and movies. Its five expressive colour options and compact, room-friendly design make it a natural match for DALI KUPID, DALI SONIK or any speaker seeking a richer foundation. Time-coherent performance and flexible controls deliver tight, balanced bass for every listening experience.


Golden Yellow


Caramel White


Chilly Blue


Solid Black


Solid White

Specifications	
Frequency range (in-room)	33 - 120 Hz ±3 dB (Line input) 33 - 200 Hz ±3 dB (LFE input)
Input impedance	25 kohm
Maximum SPL	108 dB @ 1m
Crossover LP frequencies	40 - 120 Hz
Low frequency driver	1 x 8-inch long stroke, down-firing
Enclosure type	Bass reflex
Bass Tuning Frequency	43 Hz
Connection Input(s)	2 x RCA unbalanced (Stereo) 1 x RCA unbalanced (LFE mono)
Continuous amplifier output power	170W RMS
Max. amplifier output power	220 W Peak
Max power consumption	250 W
Standby consumption	≤ 0.5 W
Functions	Power mode (On/Auto/Off) Phase (Polarity) Crossover frequency Volume On/Off switch
Dimensions (H x W x D)	319 x 295 x 310 mm 12.56 x 11.61 x 12.20 inches
Shipping dimensions (H x W x D)	415 x 380 x 380 mm 16.34 x 14.96 x 14.96 inches
Weight	9.75 kg 21.49 lb
Shipping weight	11.10 kg 24.47 lb
Accessories included	1 x Mains power cable

All technical specifications are subject to change without notice.

DALI iO

Hi-Fi Bluetooth® headphones with industry-leading battery life. The DALI iO wireless Hi-Fi headphone series combines advanced technology, high-quality components, class-leading battery life and exceptional materials for hours of authentic DALI sound on the go.



Iron Black / Caramel White



Dark Chocolate / Mocha Grey

Specifications	iO-8	iO-12
Frequency range	10 - 43,000 Hz	10 - 48,000 Hz
Analogue input sensitivity Passive mode Active mode	93 dB @ 1 mW @ 1kHz 200 mV rms, 94 dB SPL @ 1 kHz	91 dB @ 1 mW @ 1kHz 300 mV rms, 94 dB SPL @ 1 kHz
Impedance (Passive mode)	25 Ohm	
Full range driver	50mm	50mm with SMC based magnet system
Wireless input audio codecs	AAC aptX aptX HD aptX Adaptive	AAC aptX aptX HD aptX Adaptive
Supported input audio formats	16 - 24 bit audio 32 / 44.1 / 48 / 96 kHz sample rate	
Functions	Power ON/OFF Bluetooth® pair/release Volume up/down Play/pause/skip track	Take call ANC modes (ON/Transparency/OFF) Sound modes (Hi-Fi/Bass)
Other features	Wind Noise Suppression Hi-Res Audio Certified	
Noise reduction	Active Noise Cancellation (ANC)	
Hands-free calls and voice assist	Updated Clear Voice Communication (CVC)	
Battery - playback time	Up to 35 hours	
Replaceable earpads	Yes	
IP rating	IP52	
Weight	325g 0.71 lb	375 g 0.82 lb
Shipping weight	1.30 kg 2.86 lb	2.25 kg 4.96 lb
Accessories included	1.2 m USB-C cable (charging + USB audio) 1.2 m stereo mini jack cable Travel case	1.2 m USB-C cable (charging + USB audio) 1.2 m stereo mini jack cable 3.0 m stereo mini jack cable 3.5 mm stereo mini jack to 6.3 mm jack adaptor Luxury travel case





All technical specifications are subject to change without notice.

DALI KATCH G2

Setting new standards in elegance, style and quality for portable audio. The DALI KATCH G2 combines advanced technology with a stylish, elegant design to deliver room-filling home cinema sound and hours of on-the-go audio.



Iron Black Caramel White Chilly Blue

Specifications	
Frequency Range (+/-3 dB)	49 - 23,000 Hz
Maximum SPL	95 dB
Crossover Frequency	2300 Hz
High Frequency Driver	2 x 21 mm Soft Textile Dome
Low Frequency Driver	2 x 3.5" Aluminium Cone With Cloth Cap
Low Frequency Passive Driver	2 x 73 x 52 mm Steel Cone
Enclosure Type	Closed Box With Dual Passive Radiators
Power Output [watt]	2 x 25
Connection input(s)	3.5 mm mini jack Stereo
Wireless Input(s)	Bluetooth™ 5.0 Apt-X
Connection output(s)	USB Charge (5V/1A)
Amplifier Type	Fully digital Class D
Battery Type	Li-Ion 3300 mAh
Battery Playback Time	Up to 30 hours
Battery Charge Time	≈ 2 hours
Functions	Dual Sound Mode (Clear/Warm) Stereo Pair Mode Power On/Off Source Select Standby (Auto Power) Off Volume NFC Pairing
Standby Power Consumption	<0,3 W(Mains Adapter)
Dimensions (HxWxD)	138 x 268.5 x 47 mm
Weight	1.1 kg
Accessories Included	Universial Mains Adapter (1.75 m cord length) Quick Start Guide Mains Adapter Plugs Travel Bag

All technical specifications are subject to change without notice.



DALI VEGA NEW

The DALI VEGA is a state-of-the-art wireless all-in-one sound system that sets new standards for high-end single-box music in the home. With 10 drivers, powerful 400-watt amplification and advanced DSP control, VEGA delivers an outstanding audio performance in any space and any orientation. And with luxurious, tactile materials, intuitive controls and a range of inputs for almost any audio source, VEGA is the ultimate single-box speaker system.



Dark Oak



Natural Oak

DALI VEGA	
Frequency range	32 - 22,700 Hz, ±3 dB
Maximum SPL @ 1 m	110 dB
High frequency driver(s)	4 x 25 mm soft dome
Low/mid frequency driver(s)	4 x 4½-inch
Enclosure type	Tuned mass enclosure, 2 x Rectangular passive radiators (3 x 6-inches)
Passive radiator tuning frequency	32 Hz
Amplifier type	Class D Bridge-Tied Load (BTL)
Amplifier output pr. channel	8 x 50 W
Total amplifier output power	400 W
Connection output(s)	Sub out, USB power (5V/1A)
Sub out low pass filter	120 Hz
Digital input formats	PCM, stereo
Wireless input(s)	Bluetooth, BluOS, Spotify Connect, Tidal Connect , Apple Airplay 2
Bluetooth input codecs	AAC, aptX, aptX HD
BluOS input codecs	MP3, AAC (M4A, MP4), WMA, OGG, FLAC, ALAC (M4A), WMA-L, MQA WAV, AIFF (AIF, AIFC), PCM, DSD256 (DSD to PCM conversion)
Supported input audio formats	16 - 24 bit audio 32 / 44.1 / 48 / 96 / 192 kHz sample rate
Recommended placement	Standing: Free space, Standing: Near wall, Standing: Close to corner/wall, On wall: Landscape, On wall: Portrait
Functions	Adaptive Orientation Adjustment, Adaptive Stereo Enhancement, Up to 40 programmable presets, Sound adjust (Direct/Custom EQ), Rear wall distance, Bluetooth release/clear, HDMI audio delay, Optical signal/carrier detect, Input sense, LED setting, Factory reset, Stand-by (Auto Power), Mute, Power On/Off, Volume, Source Select
Maximum power consumption	250 W
Standby power consumption	≤ 3 W
Dimensions (H x W x D)	143 x 683 x 243 mm / 5.63 x 26.90 x 9.57 inches
Shipping dimensions (H x W x D)	330 x 870 x 200 mm / 13.0 x 34.25 x 7.87 inches
Weight	8.7 kg / 19.18 lb
Shipping weight	13.3 kg / 29.32 lb
Accessories included	1 x Remote control 2 x AAA batteries (for Remote control) 2 x Wall brackets (Wall) 2 x Wall brackets (VEGA) 2 x Screws for VEGA wall brackets 1 x M6 Allen key 1x Cable holder 1 x Mains cable 1 x Product registration card 1 x Quick start guide 2 x Wall mounting template 1 x Safety manual





All technical specifications are subject to change without notice.



DALI PHANTOM S

Discreet in-wall speakers with uncompromising high-end audio performance.
Featuring SMC driver magnet technology and DALI's Hybrid Tweeter module,
the DALI PHANTOM S-series delivers exceptional detail, dynamics, and scale.
Designed for those seeking the ultimate in-wall Hi-Fi or home cinema experience.



Specifications	S-80	S-180	S-280
Frequency range	59 - 25,000 Hz ±3 dB	49 - 25,000 Hz ±3 dB	48 - 25,000 Hz ±3 dB
Sensitivity	88 @ 1 m for 2.83 V	89 @ 1 m for 2.83 V	89 @ 1 m for 2.83 V
Nominal impedance	6 ohm		8 ohm
Maximum SPL	108 dB	109 dB	112 dB
Recommended amplifier power	40 - 200 Watt		40 - 400 Watt
High frequency driver	1 x 28 mm soft dome 1 x 17 x 45 mm planar		1 x 29 mm soft dome 1 x 17 x 45 mm planar
Low/Mid frequency driver(s)	1 x 8 inch		2 x 8 inch
Enclosure type	Closed box	Tuned mass enclosure 1 x 10 inch passive radiator	Tuned mass enclosure 2 x 10 inch passive radiators
Other features	Rotatable Hybrid Tweeter module		
Installation location	In-wall/On-wall		
Outer dimensions incl. grille (H x W x D)	657 x 412 x 108 mm 25.87 x 16.22 x 4.26 inches	907 x 462 x 108 mm 35.71 x18.19 x 4.26 inches	1537 x 537 x 108 mm 60.51 x 21.14 x 4.26 inches
Outer dimensions excl. grille (H x W x D)	647 x 402 x 107 mm 25.47 x 15.83 x 4.22 inches	897 x 452 x 107 mm 35.32 x 17.80 x 4.22 inches	1527 x 527 x 107 mm 60.12 x 20.75 x 4.22 inches
Cut-out dimensions (H x W)	615 x 370 mm 24.21 x 14.57 inches	865 x 420 mm 34.06 x 16.54 inches	1495 x 495 mm 58.86 x 19.49 inches
Wall thickness (total dog-leg span)	10 - 70 mm 0.39 - 2.76 inches		
Weight incl. grille	14 kg 30.86 lb	19.50 kg 43 lb	36.50 kg 80.46 lb
Shipping weight incl. grille	17.50 kg 38.58 lb	23.50 kg 51.80 lb	42 kg 92.59 lb
Accessories	Manual Cut-out template Front grille		
Optional Accessories	PHANTOM OW FRAME S-80	PHANTOM OW FRAME S-180	PHANTOM OW FRAME S-280

All technical specifications are subject to change without notice.

DALI PHANTOM M

Slimline in-wall speakers combining impressive performance with discreet installation. The DALI PHANTOM M-series offers a choice of Hybrid Tweeter or soft-dome technology, making it highly versatile for front, centre, side, and rear channels. An excellent balance of performance, design, and value.



Specifications	M-250	M-375	M-675
Frequency range	58 - 24,000 Hz ±3 dB	57 - 25,000 Hz ±3 dB	49 - 25,000 Hz ±3 dB
Sensitivity	89 dB @ 1 m for 2.83 V	89 dB @ 1 m for 2.83 V	90 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm		4 ohm
Maximum SPL	107 dB		110 dB
Recommended amplifier power	30 - 180 Watt		40 - 300 Watt
High frequency driver	1 x 28 mm soft dome	1 x 28 mm soft dome 1 x 17 x 45 mm planar	
Low/Mid frequency driver	2 x 5 inch	1 x 7 inch	2 x 7 inch
Enclosure type	Bass reflex enclosure, 2 x ports	Tuned mass enclosure, 2 x 7 inch passive radiators	Tuned mass enclosure, 4 x 7 inch passive radiators
Other features	Normal / HF+	Normal / HF+ Rotatable Hybrid Tweeter module	
Outer dimensions incl. grille (H x W x D)	779 x 254 x 106 mm 30.67 x 10.00 x 4.18 inches		1324 x 254 x 108 mm 52.13 x 10.00 x 4.25 inches
Outer dimensions excl. grille (H x W x D)	775 x 250 x 105 mm 30.51 x 9.84 x 4.14 inches		1320 x 250 x 105 mm 51.97 x 9.84 x 4.14 inches
Cut-out dimensions (H x W)	751 x 226 mm 29.57 x 8.90 inches		1298 x 226 mm 51.10 x 8.90 inches
Mounting depth	100 mm 3.94 inches		
Recommended rear volume (backbox)	N/A		
Ceiling/Wall thickness (total dog-leg span)	8 - 68 mm 0.32 - 2.68 inches		
Weight incl. Grille	8.5 kg 18.73 lb	9 kg 19.84 lb	15 kg 33 lb
Shipping weight	10 kg 22 lb	10.50 kg 23.14 lb	18 kg 39.68 lb
Accessories	Manual Cut-out template Front grille		
Optional accessories	PHANTOM M OW FRAME M-250/375		PHANTOM M OW FRAME M-675

All technical specifications are subject to change without notice.

DALI PHANTOM H

Compact in-wall speakers designed to deliver powerful, room-filling sound with minimal visual impact. Featuring wood-fibre woofers and high-performance soft-dome tweeters, the DALI PHANTOM H-series combines excellent clarity and dynamics with a choice of square and rectangular designs for flexible installation.













Specifications	H-50	H-60	H 60 R	H-80	H-80 R
Frequency range	52 - 25,000 Hz ±3 dB	51 - 25,000 Hz ±3 dB	51 - 25,000 Hz ±3 dB	46 - 25,000 Hz ±3 dB	46 - 25,000 Hz ±3 dB
Sensitivity	88 dB @ 1 m for 2.83 V	89 dB @ 1 m for 2.83 V	89 dB @ 1 m for 2.83 V	90 dB @ 1 m for 2.83 V	90 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm	6 ohm	6 ohm	6 ohm	6 ohm
Maximum SPL	105 dB	107 dB	107 dB	109 dB	109 dB
Recommended amplifier power	30 - 120 Watt	30 - 150 Watt	30 - 150 Watt	30 - 200 Watt	30 - 200 Watt
High frequency driver	1 x 28 mm soft dome	1 x 28 mm soft dome	1 x 28 mm soft dome	1 x 28 mm soft dome	1 x 28 mm soft dome
Low/Mid frequency driver	1 x 5¼ inch	1 x 6½ inch	1 x 6½ inch	1 x 8 inch	1 x 8 inch
Enclosure type	Open back	Open back	Open back	Open back	Open back
Other features	N/A	N/A	N/A	N/A	N/A
Outer dimensions incl. grille (H x W x D)	275 x 275 x 98 mm 10.83 x 10.83 x 3.86 inches	300 x 300 x 98 mm 11.81 x 11.81 x 3.86 inches	414 x 244 x 97 mm 16.30 x 9.61 x 3.82 mm	335 x 335 x 102 mm 13.19 x 13.19 x 4.02 inches	452 x 284 x 107 mm 17.80 x 11.18 x 4.22 inches
Outer dimensions excl. grille (H x W x D)	260 x 260 x 96 mm 10.24 x 10.24 x 3.78 inches	285 x 285 x 96 mm 11.22 x 11.22 x 3.78 inches	410 x 240 x 96 mm 16.14 x 9.45 x 3.78 inches	320 x 320 x 99 mm 12.60 x 12.60 x 3.90 inches	448 x 280 x 106 mm 17.64 x 11.02 x 4.18 inches
Cut-out dimensions (H x W)	239 x 239 mm 9.41 x 9.41 inches	264 x 264 mm 10.39 x 10.39 inches	390 x 220 mm 15.35 x 8.66 inches	299 x 299 mm 11.77 x 11.77 inches	427 x 260 mm 16.81 x 10.24 inches
Mounting depth	92mm 3.62 inches	92mm 3.62 inches	92mm 3.62 inches	95 mm 3.74 inches	102 mm 4.02 inches
Recommended rear volume (backbox)	5 - 25 litres	10 - 35 litres	10 - 35 litres	15 - 100 litres	15 - 100 litres
Ceiling/wall thickness (total dog-leg span)	10 - 70 mm 0.39 - 2.76 inches	10 - 70 mm 0.39 - 2.76 inches	10 - 70 mm 0.39 - 2.76 inches	10 - 70 mm 0.39 - 2.76 inches	10 - 70 mm 0.39 - 2.76 inches
Weight incl. Grille	2.50 kg 5.51 lb	3 kg 6.60 lb	3.50 kg 7.71 lb	3.50 kg 7.71 lb	4 kg 8.81 lb
Shipping weight	5.5 kg (pair) 12.12 lb (pair)	7 kg (pair) 15.43 lb (pair)	4.5 kg 9.92 lb	8.50 kg (pair) 18.70 lb (pair)	5 kg 11.02 lb
Accessories	Manual Cut-out template Front grille Logo badge	Manual Cut-out template Front grille Logo badge	Manual Cut-out template Front grille Logo badge	Manual Cut-out template Front grille Logo badge	Manual Cut-out template Front grille Logo badge
Optional accessories	PHANTOM UNIVERSAL 25 backbox	PHANTOM UNIVERSAL 25 backbox	PHANTOM UNIVERSAL 25 backbox	PHANTOM UNIVERSAL 25 backbox	PHANTOM UNIVERSAL 25 backbox

All technical specifications are subject to change without notice.

All technical specifications are subject to change without notice.

CUSTOM INSTALL

DALI PHANTOM M-80 A

With a powerful 7-inch bass/midrange driver angled at 25° and an adjustable tweeter, the DALI PHANTOM M-80 A (angled) lets you direct the sound in a specific direction for the best possible audio setup.





Specifications	
Frequency range	48 - 27,000 Hz ±3 dB
Sensitivity	86.5 dB @ 1 m for 2.83 Volt
Nominal impedance	6 ohm
Maximum SPL	106 dB
Recommended amplifier power	50 - 250 Watt
High frequency driver	1 x 28 mm soft dome
Low/Mid frequency driver	1 x 7 inch
Enclosure type	Open back
Other features	Normal / High+ Normal / Mid+
Outer dimensions incl. grille (H x W x D)	Ø 289 x 138.5 mm Ø 11.38 x 5.46 inches
Outer dimensions excl. grille (H x W x D)	Ø 278 x 138 mm Ø 10.94 x 5.44 inches
Cut-out dimensions (H x W)	Ø 261 mm Ø 10.28 inches
Mounting depth	134 mm Ø 5.28 inches
Recommended rear volume (backbox)	15 - 100 litres
Ceiling/Wall thickness (total dog-leg span)	6 - 52 mm 0.24 - 2.13 inches
Weight incl. Grille	2.8 kg 6.16 lb
Shipping weight	3.9 kg 8.58 lb
Accessories	Manual Cut-out template Front grille (CLASSIC)
Optional accessories	CLASSIC BEZEL, SQUARE and DESIGN grilles PHANTOM UNIVERSAL 25 backbox Pre-construction Kit

All technical specifications are subject to change without notice.

DALI PHANTOM K

High-performance in-wall and in-ceiling speakers with greater control over sound direction. The DALI PHANTOM K-series features an adjustable soft-dome tweeter for precise room matching, plus a low-profile option for installations with limited ceiling space. Powerful performance in a discreet, flexible design.







Specifications	K-60 LP	K-60	K-80
Frequency range	52 - 26,000 Hz ±3 dB	51 - 25,000 Hz ±3 dB	48 - 25,000 Hz ±3 dB
Sensitivity	84 dB @ 1 m for 2.83 V	87 dB @ 1 m for 2.83 V	
Nominal impedance	8 ohm	6 ohm	6 ohm
Maximum SPL	103 dB	105 dB	107 dB
Recommended amplifier power	40 - 150 W		50 - 200 W
High frequency driver	1 x 25 mm soft dome	1 x 28 mm soft dome	
Low/Mid frequency driver	1 x 6 inch low profile	1 x 6½ inch	1 x 8 inch
Enclosure type	Open back		
Other features	Normal / High+	Normal / High+ Normal / Mid+ Tiltable (pivoting) tweeter	
Outer dimensions incl. CLASSIC grille (H x W x D)	Ø 249 x 43 mm Ø 9.80 x 1.70 inches	Ø 249 x 108 mm Ø 9.80 x 4.26 inches	Ø 291 x 120 mm Ø 11.46 x 4.73 inches
Outer dimensions incl. DESIGN grille (H x W x D)	Ø 265 x 43 mm Ø 10.43 x 1.70 inches	Ø 265 x 108 mm Ø 10.43 x 4.26 inches	Ø 301 x 120 mm Ø 11.85 x 4.73 inches
Outer dimensions excl. grille (H x W x D)	Ø 242 x 41 mm Ø 9.53 x 1.62 inches	Ø 242 x 106 mm Ø 9.53 x 4.18 inches	Ø 278 x 118 mm Ø 10.95 x 4.65 inches
Cut-out dimensions	Ø 223 mm Ø 8.78 inches		Ø 261 mm Ø 10.28 inches
Mounting depth incl. BACK CAN	N/A	217 mm 8.54 inches	
Recommended rear volume (backbox)	3 - 30 litres	5 - 50 litres	7 - 100 litres
Ceiling/wall thickness (total dog-leg span)	10.5 - 28 mm 0.41 - 1.10 inches	9 - 65 mm 0.35 - 2.56 inches	
Weight incl. grille	1.20 kg 2.64 lb	2.50 kg 5.51 lb	3.50 kg 7.71 lb
Shipping weight	2.50 kg 5.51 lb	3.50 kg 7.71 lb	4.50 kg 9.92 lb
Accessories	Manual Cut-out template Front grille	Manual Cut-out template Front grille Low-profile doglegs	
Optional accessories	CLASSIC, SQUARE and DESIGN grilles PHANTOM UNIVERSAL 25 backbox Pre-construction Kit	CLASSIC, SQUARE and DESIGN grilles PHANTOM K-60 BACK CAN (retrofit) PHANTOM UNIVERSAL 25 backbox Pre-construction Kit	

All technical specifications are subject to change without notice.

DALI PHANTOM E

Flexible in-wall and in-ceiling speakers designed for discreet, seamless integration. The DALI PHANTOM E-series can be installed almost invisibly, making it ideal for music, home cinema, and Dolby Atmos height channels. A versatile choice when you want excellent sound without compromising the look of your room.



DALI PHANTOM E	E-50	E-60	E-60 S
Frequency range	58 - 25,000 Hz ±3 dB	52 - 25,000 Hz ±3 dB	57 - 25,000 Hz ±3 dB
Sensitivity	87 dB @ 1 m for 2.83 V	88 dB @ 1 m for 2.83 V	90 dB @ 1 m for 2.83 V (both channels)
Nominal impedance	8 ohm	8 ohm	8 + 8 ohm
Maximum SPL	104 dB	105 dB	105 dB
Recommended amplifier power	40 - 120 Watt	30 - 120 Watt	2 x 20 - 80 Watt
High frequency driver	1 x 25 mm soft dome		2 x 20 mm soft dome
Low/Mid frequency driver	1 x 5¼ inch	1 x 6½ inch	1 x 6½ inch dual voice coil
Enclosure type	Open back		
Other features	Normal / High+ Normal / Mid+		
IP rating	N/A		
Temperature range	N/A		
Outer dimensions incl. CLASSIC grille (H x W x D)	Ø 227 x 101 mm Ø 8.94 x 3.98 inches	Ø 249 x 101 mm Ø 9.80 x 3.98 inches	Ø 249 x 107 mm Ø 9.80 x 4.22 inches
Outer dimensions excl. grille (H x W x D)	Ø 214 x 99 mm Ø 8.43 x 3.90 inches	Ø 242 x 99 mm Ø 9.53 x 3.90 inches	Ø 242 x 105 mm Ø 9.53 x 4.14 inches
Cut-out dimensions	Ø 197 mm Ø 7.76 inches	Ø 225 mm Ø 8.86 inches	
Mounting depth	95 mm 3.74 inches	95 mm 3.74 inches	101 mm 3.98 inches
Recommended rear volume (backbox)	5 - 35 litres	5 - 50 litres	5 - 35 litres
Ceiling/wall thickness (total dog-leg span)	10 - 70 mm 0.39 - 2.76 inches		
Weight incl.grille	2 kg 4.40 lb		
Shipping weight	2.50 kg 5.51 lb	3 kg 6.60 lb	
Accessories	Manual Cut-out template Front grille Logo badge		
Optional accessories	CLASSIC and SQUARE grilles Pre-construction Kit PHANTOM UNIVERSAL 25 backbox	CLASSIC, SQUARE and DESIGN grilles Pre-construction Kit PHANTOM UNIVERSAL 25 backbox	

DALI PHANTOM E WEATHER RESISTANT

With their engineered, weather-resistant features, the DALI PHANTOM E-60 WR and the DALI PHANTOM E-80 WR in-ceiling loudspeakers are suitable for covered outdoor and high-humidity locations. With a working range of -20 to +60°C and an IP65 rating, they're ready to take on the elements. So whether you want background music for the laundry room, bathroom or spa, or immersive multi-channel sound on the terrace, the PHANTOM E-80 WR delivers.



E-80	E-60 WR	E-80 WR
49 - 25,000 Hz ±3 dB	52 - 25,000 Hz ±3 dB	49 - 25,000 Hz ±3 dB
89.5 dB @ 1 m for 2.83 V	88 dB @ 1 m for 2.83 V	89.5 dB @ 1 m for 2.83 V
6 ohm	8 ohm	6 ohm
107 dB	105 dB	107 dB
30 - 150 Watt	30 - 120 Watt	30 - 150 Watt
1 x 25 mm soft dome		
1 x 8 inch	1 x 6½ inch	1 x 8 inch
Open back		
Normal / High+ Normal / Mid+	Normal / High+ Normal / Mid+ Galvanized front grille	
N/A	IP65	
N/A	-20°C to +60°C / 4°F to 140 °F	
Ø 291 x 116 mm Ø 11.46 x 4.57 inches	Ø 249 x 101 mm Ø 9.80 x 3.98 inches	Ø 291 x 116 mm Ø 11.46 x 4.57 inches
Ø 278 x 113 mm Ø 10.94 x 4.45 inches	Ø 242 x 99 mm Ø 9.53 x 3.90 inches	Ø 278 x 113 mm Ø 10.94 x 4.45 inches
Ø 261 mm Ø 10.28 inches	Ø 225 mm Ø 8.86 inches	Ø 261 mm Ø 10.28 inches
109 mm 4.29 inches	95 mm 3.74 inches	109 mm 4.29 inches
10 - 100 litres	5 - 50 litres	10 - 100 litres
10 - 70 mm 0.39 - 2.76 inches	10 - 70 mm 0.39 - 2.76 inches	
2.50 kg 5.51 lb	2 kg 4.40 lb	2.50 kg 5.51 lb
3.50 kg 7.71 lb	3 kg 6.60 lb	3.50 kg 7.71 lb
Manual Cut-out template Front grille Logo badge		
CLASSIC, SQUARE and DESIGN grilles Pre-construction Kit PHANTOM UNIVERSAL 25 backbox	Pre-construction Kit PHANTOM UNIVERSAL 25 backbox	





DALI GARDIAN OW 6

The DALI GARDIAN OW 6 outdoor loudspeaker enables DALI sound quality to leave the listening room and venture outdoors. Its IP67 certification provides effective protection against dust and water ingress enabling installation even in exposed locations throughout all seasons and weather conditions.



Black



White

Specifications	
Frequency range	47 - 25,000 Hz +/- 3dB
Sensitivity	84 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm
Maximum SPL	103 dB
Recommended amplifier power	50 - 200 Watt
High frequency driver	1 x 25 mm soft dome (Coaxially mounted)
Low/Mid frequency driver	1 x 5 inch
Enclosure type	Tuned Mass Enclosure,
	2 x 5 inch (oval) passive radiators
Other features	Click n' Connect wall bracket
IP rating	IP 67
Temperature range	-20°C to +70°C / 4°F to 175 °F
Outer dimensions incl. grille (H x W x D)	200 x 372 x 206 mm
	7.87 x 14.65 x 8.11 inches
Weight incl. grille	4.08 kg
	9 lbs
Shipping weight (pair)	10.4 kg
	22.92 lbs
Included accessories	Wall Mounting Template
Optional accessories	Wall Bracket Cover

All technical specifications are subject to change without notice.



DALI PHANTOM CI AMPLIFIERS

The multi-purpose amplifiers feature built-in Digital Signal Processing and are designed to deliver the best possible sound from any DALI CI audio installation. Model-specific presets are continuously provided to optimise performance across a range of applications. Aimed primarily at high-performance home cinema installations and in-wall subwoofers, the amplifiers can also power in-wall and in-ceiling speakers in multi-room installations.



Specifications	CI AMP-2500 DSP	CI AMP-4750 DSP	CI AMP-4125 DSP
Frequency range	12 Hz – 20 kHz (+/- 0.5 dB, 8 Ω load, 3 dB below rated power)	12 Hz – 20 kHz (+/- 1 dB, 8 Ω load, 3 dB below rated power)	13 Hz – 20 kHz (+/- 1 dB, 8 ohm load, 3 dB below rated power)
Output channels	2 x Lo-Z speaker (4 - 16 ohm) 1 x Hi-Z speaker (70V / 100V) 1x S/PDIF digital out, RCA	4 x Lo-Z loudspeaker (4 - 16 ohm) 2 x Hi-Z loudspeaker (70V / 100V) 1 x S/PDIF digital out, RCA	
Maximum speaker cable cross section	2,5 mm2 / AWG 14 (Euroblock/»Phoenix» standard)		
Output power @ 4 ohm	2 x 500 W (SE) 1 x 1000 W (BTL)	4x 750 W (SE) 2x 1500 W (BTL)	4 x 125 W (SE)* 2 x 250 W (BTL*)
Output power @ 8 ohm	2 x 250 W (SE) 1 x 1000 W (BTL)	4 x 400 W (SE) 2 x 1500 W (BTL)	4 x 125 W (SE) 2 x 250 W (BTL*)
Output power @ 70V	1 x 1000 W (BTL)	2 x 1200 W (BTL)	2 x 250 W (BTL)
Output power @ 100V	1 x 1000 W (BTL)	2 x 1500 W (BTL)	2 x 250 W (BTL)
Power Sharing (up to)	N/A	N/A	2 x 250 W
Total system power	1000 W	3000 W	500 W
Output voltage	45 Vrms (SE) - 90 Vrms (BTL), 70/100V (High-Z)	SE: 85Vp / 170Vpp (unloaded), BTL: 170Vp / 340Vpp (unloaded), 70/100V (High-Z)	70Vp / 140Vpp (SE unloaded), 140Vp / 280 Vpp (BTL unloaded), 70/100 V (High-Z)
Output circuitry	UMAC™ Class D. Full bandwidth PWM modulator with ultra-low distortion		
Signal to noise-ratio	>108 dB (A-weighted, 20 Hz - 20 kHz, 8 Ω load)	>106 dB (A-weighted, 20 Hz - 20 kHz, 8 Ω load)	
THD+N (typical)	< 0.05 % (20 Hz - 20 kHz, 8 Ω load, 3 dB below rated power)		
Other features	Short circuit protection, DC protection, Undervoltage protection, Temperature protection, Overload protection, Rack mountable		
Power supply	UREC™ universal mains switch mode power supply with Power Factor Correction (PFC) and standby converter		
Power ratings	1 % THD @ 120 Vac and 230 Vac		
Standby consumption	< 0.5 W		
Outer dimensions (H x W x D)	88 x 440 x 320 mm 3.46 x 17.32 x 12.60 inches		44 x 220 x 320 mm 1.70 x 8.70 x 12.60 inches
Weight	5.90 kg 13 lb	7.22 kg 15.91 lb	1.97 kg 4.34 lb
Shipping weight	7.50 kg 16.50 lb	9.34 kg 20.59 lb	2.71 kg 5.97 lb
Accessories	2x Two channel balanced input connector 1x Two channel speaker output connector 1x GPIO socket connector 1x Mains power cable 4x Adhesive rubber feet 2x Rack mount ears (mounted)	2x Two channel balanced input connector 2x Two channel speaker output connector 1x GPIO socket connector 1x Mains power cable 4x Adhesive rubber feet 2x Rack mount ears (mounted)	2x Two channel balanced input connector 2x Two channel speaker output connector 1x GPIO socket connector 1x Mains power cable 4x Adhesive rubber feet
Optional accessories	N/A	N/A	DALI CI AMP - 1 RU Rack Mount Kit

*SE – Conventional, single ended output mode
**BTL – Bridge-tied load output mode. (8/16 ohms only!)
All technical specifications are subject to change without notice.



DALI PHANTOM IW-SUB S-100

The DALI PHANTOM IW SUB S-100 is a 10-inch in-wall, on-wall or floor-mounted subwoofer with an ultra-shallow profile for simple, discreet installation and ultimate versatility. The rigid construction, high power handling and ability to deliver high volume levels bring an exceptional musical and cinematic performance to any Hi-Fi stereo or multichannel home theatre setup.





Specifications	
Frequency range	26 - 250 Hz, ±3 dB
Sensitivity	84 dB @ 1 m for 2.83 V
Nominal impedance	6 ohm
Recommended amplifier power	200 - 500 W RMS
Recommended amplifier	DALI PHANTOM AMP-2500 DSP
Maximum SPL	110 dB @ 1m
Low frequency driver	1 x 10 inch long throw, low profile
Connection input	Single wire
Enclosure type	Closed box / Infinite baffle
Outer dimensions incl. grille (H x W x D)	657 x 412 x 107 mm 25.87 x 16.22 x 4.22 inches
Outer dimensions excl. grille (H x W x D)	647 x 402 x 106 mm 25.47 x 15.83 x 4.18 inches
Cut-out dimensions (H x W)	615 x 370 mm 24.21 x 14.57 inches
Wall thickness (total dog-leg span)	10 - 70 mm 0.39 - 2.76 inches
Weight incl. grille	17.25 kg 38.03 lb
Shipping weight	21 kg 46.30 lb
Accessories:	Cut-out template Front grille Rubber pads
Optional accessories	PHANTOM OW FRAME S-80

*All SUB S-100 specifications are measured, driven by the PHANTOM CI AMP 2500 DSP amplifier. All technical specifications are subject to change without notice.

DALI SOUND HUB

The DALI SOUND HUB streams high-resolution audio to DALI RUBICON C speakers while automatically switching between sources, bringing uncompromising convenience to music and movie lovers who demand more.

BluOS COMPATIBLE



Specifications	DALI SOUND HUB
Input connections	2 × Optical (TosLink) Coax (S/PDIF) RCA (Analogue stereo) 3.5 mm Stereo (mini-jack) 2 × Plug-in module
Input Impedance RCA [Ω]	10k Ohm
Input Sensitivity RCA [V]	2.3 V
Input Impedance 3.5mm mini-jack	10k Ohm
Input Sensitivity 3.5mm mini-jack	1.2 V
Input Impedance S/PDIF	75 Ohm
Output Connections	Stereo Line level (RCA), Sub-out (RCA), USB Charge (5V/1A)
Output Voltage Max. Line Level	1.9 V
Output Voltage Max. Sub-Out	0.9 V
Maximum digital resolution [bits/kHz]	24 / 96
Wireless Input	Bluetooth 4.2 (AAC, Apt-X, Apt-X HD)
Wireless Output	Full 24 Bit / 96 kHz (No bit-loss attenuated)
Input mains	Universal AC Mains Adapter (1.75 m wire length)
Maximum Power Consumption	4.5 W
Standby Power Consumption	2.5 W
Dimensions (H × W × D)	76 × 300 × 213 mm 3.0 × 11.8 × 8.4 inches
Weight	1.6 kg / 3.2 lbs
Accessories Included	Quick Setup Guide

BluOS NPM-2i

The NPM-2i BluOS expansion module for the DALI SOUND HUB lets you stream music from all your favourite streaming services to BluOS-enabled speakers around the house using the BluOS app.

BluOS AirPlay 2 Works with Apple AirPlay · Spotify · MQA · TIDAL connect



Specifications	BluOS NPM-2i
Operating System	BluOS
Supported Operating Systems	iOS, Android, Windows Vista, 7, 8, 10, macOS X 10-11
Supported File Formats	MP3, AAC, WMA, WMA-L, OGG, FLAC, ALAC, WAV, AIFF, MQA 32
Native Sampling Rates	192 kHz
Bit Depths	16 - 24
Music Service Integrations	17+
3rd-Party Integrations	Apple AirPlay 2
Control System Integrations	Crestron, Control 4, RTI, ELAN, URC, Push, Lutron, iPort Supports
Voice Control Integrations	Amazon Alexa Skills, Works with Google Assistant Skills
Back Panel Status	LED
Processor	ARM® Cortex™ -A9, 1 GHz
Updates	Over the air
Discovery Protocols Supported	Bonjour, MDNS, LSDP
Ethernet/LAN	Ethernet RJ45, 100 Base-T
WiFi (External USB Accessory)	802.11 b/g/n WiFi
USB IN × 2	Type A (FAT32 or NTFS-formatted)
USB	Type B (mini) for product servicing
Edge Connector	70 pin
Power Consumption (Idle)	3 W
Dimensions (H × W × D)	155 × 114 × 36 mm 6.1 × 4.9 × 1.4 inches
Weight	0.22 kg / 0.5 lbs



NEW

STAND 1

SONIK 1, 3
OBERON 1, 3
OPTICON 1 MK2
MENUET SE



NEW

STAND 3

OPTICON 2 MK2
RUBICON 2 C
RUBIKORE 2



EPIKORE STAND

EPIKORE 3

This information has been presented to you by your authorised DALI dealer.

DALI reserves the right to change these terms and conditions at any time without prior notice.

Facebook: **DALI Speakers** | Instagram: **@dalispeakers** | LinkedIn: **DALI Speakers A/S**
Email: **info@dali.dk** | Website: **dali-speakers.com** | Tel: **+45 9672 1155**
Dali Alle 1, 9610 Nørager, Denmark.



DALI-SPEAKERS.COM